


# HEX SHAFT STYLE DATA SHEET

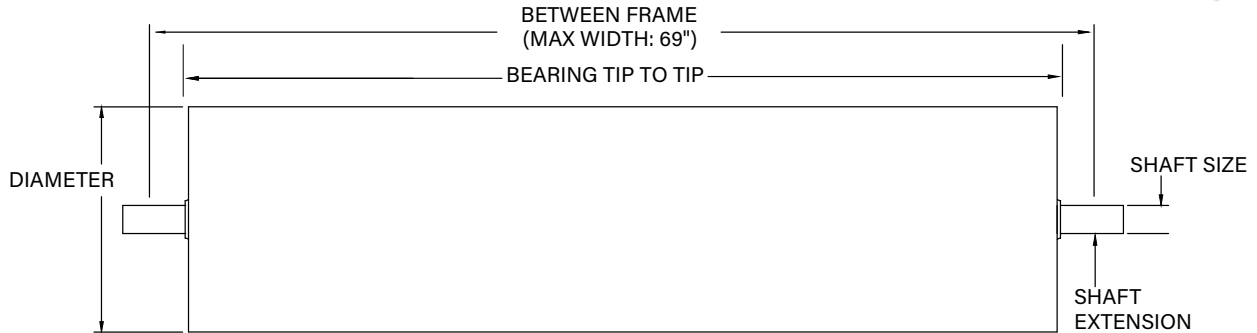

DIAMETER - 1.9"
7/16 SHAFT ONLY
16 ga Galvanized or Mild Steel .145 PVC
BEARING TIP TO TIP _____
BETWEEN FRAME _____
SHAFT LENGTH _____
SHAFT STYLE: C (NO SHAFT) / CS (PIN RETAINED) / CSS (SPRING LOADED)
QTY _____

DIAMETER - 2"
7/16 SHAFT ONLY
14 ga Mild Steel
BEARING TIP TO TIP _____
BETWEEN FRAME _____
SHAFT LENGTH _____
SHAFT STYLE: C (NO SHAFT) / CS (PIN RETAINED) / CSS (SPRING LOADED)
QTY _____

DIAMETER - 2.5"
7/16 or 11/16 SHAFT
14 ga or 11 ga Steel
BEARING TIP TO TIP _____
BETWEEN FRAME _____
SHAFT LENGTH _____
SHAFT STYLE: C (NO SHAFT) / CS (PIN RETAINED) / CSS (SPRING LOADED)
QTY _____

COMPANY NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

CONTACT NAME \_\_\_\_\_

PHONE \_\_\_\_\_

E-MAIL \_\_\_\_\_

DATE \_\_\_\_\_

NOTES \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

11/16" SHAFT ADAPTORS
Utilize adaptors for sizes not listed or higher load requirements.
FACE WIDTH _____
BETWEEN FRAME _____
DIAMETER _____
QTY _____