

Idler Selection Guide

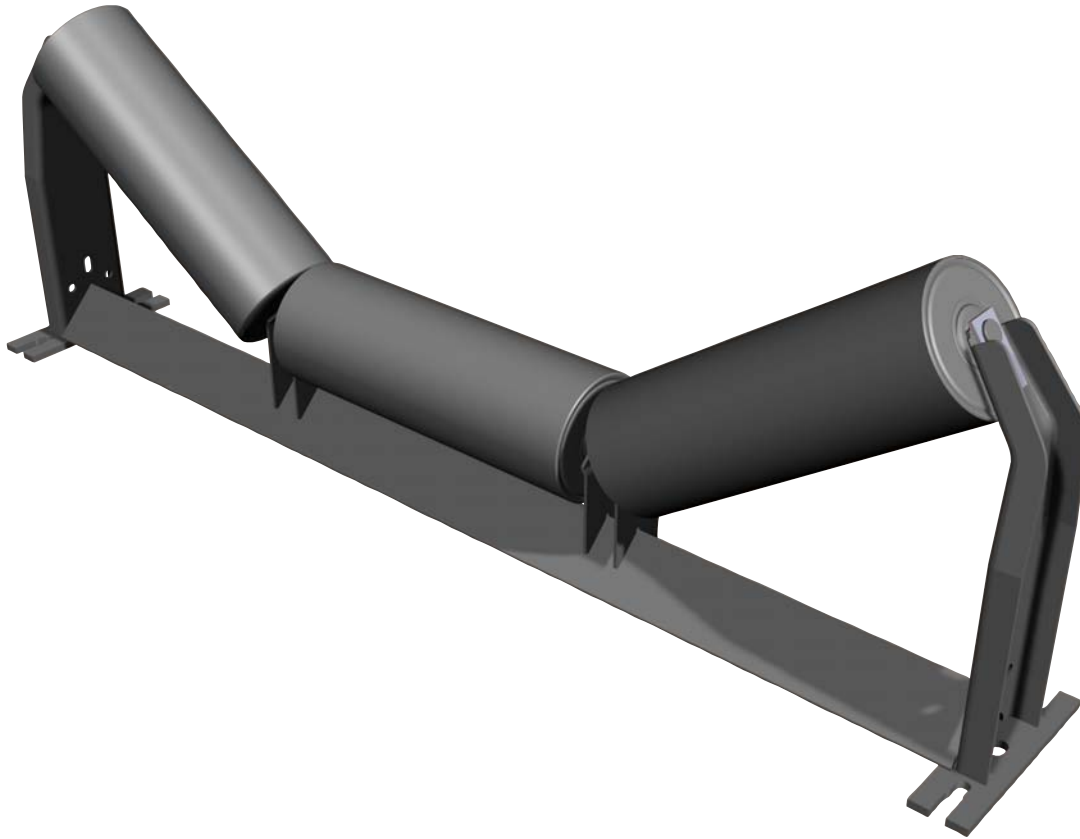


Table of Contents

Getting Started	2
Belt Capacity	3
Carrying & Impact Idlers	4
Trougher & Impact Ratings	5
Return Idlers	6
Transition Idlers	7
Example	8, 9
APPENDIX	
Material Properties	10, 11, 12
Belt Speed, Picking Idlers, Live Shaft & Idler Spacing	13

The charts included in this document is a guide based on analysis of typical conveyors.

As each application is different, no warranty can be implied or given based on these charts alone.

For operation & maintenance manuals, check out our website
at <http://www.ppipella.com>, just click on Catalogs.

Copyright © 2007-2009, Precision Pulley & Idler, All Rights Reserved

Subject to change without notice

Catalog ISG, Rev 10/09

800.247.1228
www.ppipella.com 
Employee Owned

Idler Selection

Material and Conveyor Data

Precision idlers meet or exceed CEMA requirements for load, life, and dimensions. Load limits shown in the following tables reflect CEMA methods. Basic calculations use bearing L10 requirements at 500 RPM in the table below.

While the smaller cans will help with reduced build up, larger cans help with lower speed, RPM (Revolutions Per Minute) and therefore the bearing, extending bearing life. For this reason, the suggested maximum belt speed for different can size exists, i.e. the 500 RPM rating for CEMA idlers translate into the following belt speeds:


CEMA	Design
	L10 Life hours
B	30,000
C	30,000
D	60,000
E	60,000

CEMA	Design Limit
	FPM
4"	534
5"	654
6"	758
7"	916

If these suggested maximums are exceeded, then a decreased life of the idler bearing will be experienced. To overcome this may require a decreased rating, or an increase in CEMA class. For more detailed look at conveyor design and idler selection consult CEMA's book, "Belt Conveyors For Bulk Materials."

The following steps and tables will enable you to select belt speed and belt width for most applications. Precision engineers are available to assist if you have special requirements, including specific bearing life expectations.

Diagram 2

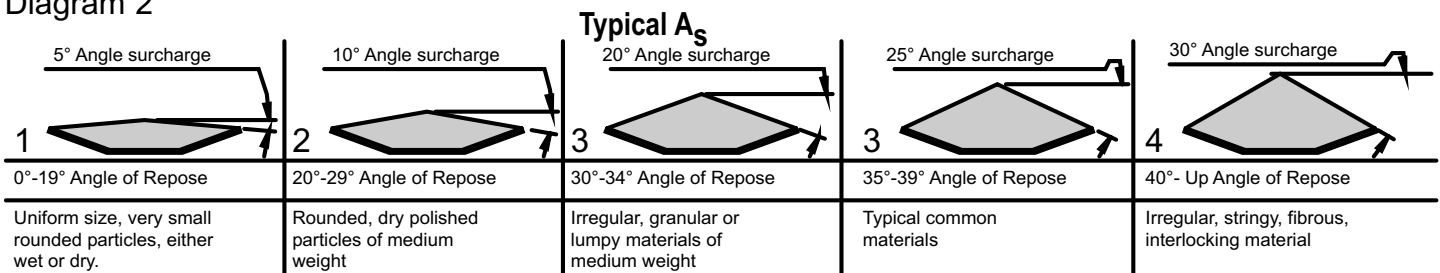

Copyright © 2007-2009, Precision Pulley & Idler, All Rights Reserved


Getting Started

If you know your tensions, belt width and speed, skip to step 5 on page 4.

What are you conveying? Do you know your material?

Important information needed is the material density (weight per cubic foot), and the Angle of Repose. To determine the Angle of Surcharge, look up Angle of Repose in Table 13 of the appendix, and apply it to Diagram 2.

What is the angle of repose? There are two basic angles that describe the flow nature of material. One is the Angle of Repose (Ar); the other is the Angle of Surcharge (As). The Angle of Repose is the angle the material makes with the horizontal when dumped in a pile, such as a stockpile or a stationary belt. It is a direct measure of the static friction of the material.

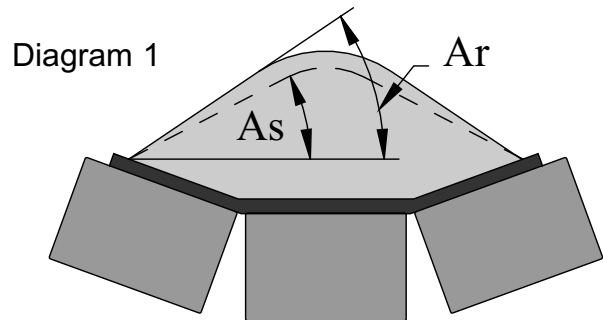

The Angle of Surcharge (As) is the angle the material makes with the horizontal when the material is bumped, or moving, such as on a moving conveyor belt. It is a direct measure of the kinetic friction. The higher the Surcharge Angle, the more material can be stacked on the belt for conveying. It is often the maximum incline of the conveyor. The surcharge angle is normally 5° to 15° less than the angle of repose.

For operation & maintenance manuals, check out our website at <http://www.ppipella.com>, just click on Catalogs.



Idler Selection-Belt Capacity

Step 1) Determine the material characteristics; lump size, surcharge angle of material being conveyed, the desired or preferred trough angle, and cubic weight per foot of material. The trough angle is the angle the wing roll of the trougher make with the horizontal. (See Table 13)

Note: If you are unsure use 35° for standard troughers, use 20° for CIT & unequal troughers.

Step 2) Calculate the Volumetric Capacity, C, required. This is calculated from the Tons Per Hour (TPH), using the following formula:

$$C(\text{ft}^3/\text{hr}) = \text{TPH} * 2000 / \text{Material density (lbs/ft}^3)$$

Step 3) Calculate the Equivalent Capacity, (Ceq): The charts list the capacity for various belt widths at the different troughing angle. These have been calculated at a belt speed of 100 FPM. To make it easier to pick out the right combination, calculate the Ceq using the following formula:

$$\text{Equivalent Capacity (Ceq)} = C * 100 / \text{FPM}$$

Conveyor speed is an important factor in conveyor design. Higher speeds will normally decrease capital equipment costs, but can increase idler costs, risk of damage during loading, etc. Suggested speeds and limits are listed for some Bulk Materials in Table 14 of the Appendix.

NOTE: Common conveyor speed is 500 FPM. The suggested minimum belt speed for proper discharge is 350 fpm.

Table 4 - Flat Belt

Belt Width (inches)	Capacity at 100 FPM (Ft3 / Hr) (C EQ)						
	Surcharge Angle						
	0°	5°	10°	15°	20°	25°	30°
18	NA	123	246	372	498	630	762
24	NA	232	466	702	942	1,190	1,444
30	NA	376	756	1,137	1,527	1,928	2,340
36	NA	555	1,113	1,677	2,253	2,844	3,450
42	NA	768	1,540	2,322	3,120	3,936	4,776
48	NA	1,016	2,037	3,072	4,126	5,208	6,318
54	NA	1,298	2,604	3,927	5,273	6,654	8,076
60	NA	1,614	3,240	4,885	6,560	8,278	10,050
72	NA	2,353	4,720	7,116	9,558	12,060	14,640
84	NA	3,229	6,478	9,767	13,117	16,551	20,092
96	NA	3,977	7,979	12,029	16,155	20,384	24,746

For operation & maintenance manuals, check out our website at <http://www.ppipella.com>, just click on Catalogs.

Subject to change without notice

Table 1 - 20° Troughed Belt - 3 Equal Rolls

Belt Width (inches)	Capacity at 100 FPM (Ft3 / Hr) (C EQ)						
	Surcharge Angle						
	0°	5°	10°	15°	20°	25°	30°
18	537	653	769	886	1,005	1,128	1,254
24	1,041	1,258	1,477	1,698	1,924	2,155	2,394
30	1,708	2,060	2,414	2,772	3,137	3,511	3,897
36	2,538	3,057	3,579	4,107	4,645	5,196	5,765
42	3,533	4,250	4,972	5,703	6,447	7,210	7,997
48	4,691	5,640	6,594	7,560	8,544	9,552	10,592
54	6,013	7,225	8,444	9,678	10,935	12,223	13,552
60	7,498	9,006	10,522	12,057	13,621	15,223	16,876
72	10,961	13,155	15,364	17,599	19,876	22,210	24,617
84	15,078	18,089	21,119	24,186	27,310	30,511	33,814
96	18,596	22,304	26,035	29,811	33,568	37,601	41,667

Table 2 - 35° Troughed Belt - 3 Equal Rolls

Belt Width (inches)	Capacity at 100 FPM (Ft3 / Hr) (C EQ)						
	Surcharge Angle						
	0°	5°	10°	15°	20°	25°	30°
18	864	964	1,066	1,169	1,274	1,381	1,492
24	1,668	1,857	2,048	2,241	2,438	2,640	2,847
30	2,733	3,039	3,346	3,658	3,975	4,300	4,636
36	4,058	4,508	4,961	5,419	5,886	6,364	6,857
42	5,644	6,266	6,891	7,524	8,169	8,830	9,511
48	7,491	8,312	9,138	9,974	10,825	11,698	12,598
54	9,598	10,646	11,700	12,768	13,855	14,969	16,118
60	11,966	13,269	14,580	15,906	17,257	18,642	21,058
72	17,484	19,378	21,285	23,215	25,182	27,196	29,275
84	24,043	26,642	29,256	31,902	34,598	37,361	40,210
96	29,647	32,846	36,064	39,321	42,639	46,040	49,548

Table 3 - 45° Troughed Belt - 3 Equal Rolls

Belt Width (inches)	Capacity at 100 FPM (Ft3 / Hr) (C EQ)						
	Surcharge Angle						
	0°	5°	10°	15°	20°	25°	30°
18	1,021	1,109	1,198	1,289	1,380	1,475	1,572
24	1,967	2,132	2,299	2,467	2,638	2,814	2,996
30	3,218	3,484	3,752	4,023	4,299	4,581	4,873
36	4,775	5,165	5,558	5,955	6,360	6,775	7,204
42	6,636	7,175	7,717	8,265	8,824	9,397	9,987
48	8,803	9,514	10,229	10,953	11,690	12,445	13,224
54	11,276	12,182	13,094	14,017	14,957	15,921	16,915
60	14,053	15,179	16,312	17,458	18,626	19,823	21,059
72	20,524	22,160	23,807	25,473	27,171	28,910	30,705
84	28,216	30,458	32,714	34,997	37,323	39,706	42,165
96	34,786	37,545	40,320	43,130	45,991	48,924	51,950

Copyright © 2007-2009, Precision Pulley & Idler, All Rights Reserved

Idler Selection-Carrying Idlers

Step 4) Select the belt width using Tables 1 thru 4 using C_{eq} in step 3.

NOTE: Lump Size – The lump size influences the belt specifications and the choice of carrying idlers. There is an empirical relationship between lump size and belt width. For a 20° surcharge angle with 10% lumps and 90% fines, the recommended maximum lump size is one third of the belt width (BW/3). If it is all lumps, then the recommended maximum lump size is one fifth of the belt width (BW/5).

Carrying Idler Selection

Step 5) Determine the Calculated Idler Load (CIL)

$$CIL = ((Wb + (Wm * K1)) * Si) + IML$$

where:

Wb = Weight of the belt (lb/ft) – use actual or estimate from Table 5

Wm = Weight of the material (lb/ft) = 33.3 * TPH / FPM

Si = Spacing of Idlers (ft)

K1 = Lump adjustment factor (see Table 6)

IML = Idler Misalignment Load (lb) = 1/6 * D * T / Si

where:

D = Misalignment (in) – This is the deviation in height from one idler to the adjacent idler due to variations in framework.

T = Belt Tension (lb) & **Si** = Spacing of Idlers (ft)

Estimated CIL - when Tensions are not yet known for well aligned structures

$$CIL = 1.25 * ((Wb + (Wm * K1)) * Si)$$

for portable or not so well aligned structures

$$CIL = 1.5 * ((Wb + (Wm * K1)) * Si)$$

Note: While idler spacing can vary, depending upon individual requirements, many conveyors will use 4 feet as the spacing for carrying idlers, 1 foot for impact idlers, and 8 or 10 feet for returns. 10 feet is common, while some use 8 feet, i.e. double the carrying idler spacing, as this makes framework simpler. For more detail information see Table 16 in the appendix, or CEMA's Book "Belt Conveyors For Bulk Materials."

Table 5
Average Belt Wt

BELT WIDTH	Material carried lb/cu.ft.		
	30-74	75-129	130-200
18	3.5	4	4.5
24	4.5	5.5	6
30	6	7	8
36	9	10	12
42	11	12	14
48	14	15	17
54	16	17	19
60	18	20	22
72	21	24	26
84	25	30	33
96	30	35	38

Table 6
 K_1 Lump Adjustment

MAXIMUM LUMP SIZE (Inches)	MATERIAL WEIGHT: lbs/cu.ft.							
	50	75	100	125	150	175	200	
4	1	1	1	1	1.1	1.1	1.1	
6	1	1	1	1.1	1.1	1.1	1.1	
8	1	1	1.1	1.1	1.1	1.2	1.2	
10	1	1.1	1.1	1.2	1.2	1.2	1.2	
12	1	1.1	1.1	1.2	1.2	1.2	1.3	
14	1.1	1.1	1.1	1.2	1.2	1.3	1.3	
16	1.1	1.1	1.2	1.2	1.3	1.3	1.4	
18	1.1	1.1	1.2	1.2	1.3	1.3	1.4	

Step 6) Using the calculated value CIL, the belt width, and the troughing angle, select the Idler Series from Tables on the following page.

(For Picking (unequals), and Live Shaft Idler see Table 15 in the appendix. For Flat Carrying Idlers, see Table 10.)

Note: There are numerous factors governing idler life, e.g. speed, dirt, water, maintenance, temperature, etc. For more information & how to calculate these factors, see CEMA's Book "Belt Conveyors For Bulk Materials."

Impact Idler Selection

Step 7) Determine the weight of the largest lump size using Table 8.

Step 8) Check the impact of the largest lump and the maximum drop by using top half of Table 9.

Note: Impact Idlers have the same rating as EZI .and are good for all of the EZI areas.

Step 9) Check the material flow impact by using bottom half of Table 9.

Step 10) Select the appropriate Impact System for your conveyor from step 7 and/or 8 using the heaviest selected.

For operation & maintenance manuals, check out our website at <http://www.ppipella.com>, just click on Catalogs.

Idler Selection-Ratings

Table 7 - Trougher Ratings

BELT WIDTH	20° TROUGHING ANGLE RATINGS (lb)			
	B	C	D	E
18	410	900	1200	
24	410	900	1200	
30	410	900	1200	
36	410	900	1200	1800
42	390	850	1200	1800
48	390	800	1200	1800
54		750	1116	1800
60		700	1070	1800
66				1800
72			977	1800
84				1800
96				1750
BELT WIDTH	35° TROUGHING ANGLE RATINGS (lb)			
	B	C	D	E
18	410	900	1200	
24	410	900	1200	
30	410	900	1200	
36	410	837	1200	1800
42	363	791	1200	1800
48	353	744	1200	1800
54		698	1116	1800
60		650	1070	1800
66				1800
72			977	1800
84				1674
96				1628
BELT WIDTH	45° TROUGHING ANGLE RATINGS (lb)			
	B	C	D	E
18	410	900	1200	
24	410	900	1200	
30	410	900	1200	
36	369	810	1200	1800
42	351	765	1200	1800
48	342	720	1200	1800
54		675	1080	1800
60		630	1035	1800
66				1800
72			945	1800
84				1620
96				1575

Table 8 - Maximum Lump Weight

DENSITY lbs/ft ³	AVERAGE DIMENSION SIZE OF LUMP (IN)													
	2	3	4	5	6	7	8	9	10	12	14	16	18	
50	0.4	1.3	3	5.8	10	14	21	30	40	70	100	148	211	
75	0.6	1.9	4.5	8.6	15	21	31	44	61	105	149	222	316	
100	0.7	2.6	5.9	12	20	28	41	59	81	140	199	296	421	
125	0.9	3.2	7.4	14	25	35	52	74	101	175	248	371	527	
150	1.1	3.8	9	17	30	42	62	89	121	210	298	444	632	
175	1.3	4.5	10.4	20.2	35	49	73	104	142	245	348	518	737	

Table 9 - Impact Load Ratings

Max lump size	2 foot drop	4 foot drop	6 foot drop	8 foot drop	10 foot drop
20 lbs	EZI	EZI	TIS - D	TIS - D	TIS - D
40 lbs					
60 lbs		TIS - D			
80 lbs					
100 lbs	TIS - D				
120 lbs					TIS - E
140 lbs					
160 lbs				TIS - E	
180 lbs					
200 lbs			TIS - E		
220 lbs					
240 lbs		TIS - E			
260 lbs					
280 lbs	TIS - E				
300 lbs					
TPH	2 foot drop	4 foot drop	6 foot drop	8 foot drop	10 foot drop
200	EZI	EZI	EZI	EZI	TIS - D
400				TIS - D	
600			TIS - D		
800		TIS - D			
1000	TIS - D				
1200					
1400					TIS - E
1600					
1800				TIS - E	
2000					
2200			TIS - E		
2400					
2600		TIS - E			
2800					
3000	TIS - E				

For operation & maintenance manuals, check out our website at <http://www.ppipella.com>, just click on Catalogs.

Subject to change without notice

Copyright © 2007-2009, Precision Pulley & Idler, All Rights Reserved

Idler Selection-Returns

While many use EZR Slider (all rails, with no rolls) for impact beds, they have limited “give”, or impact absorption. Impact Idlers and/or EZ Slider with an impact center roll will have more impact absorption than slider rails. (This is based not only on the strength of the idler product, but also the effect that the product has on the absorption of the impact!)

For impacts beyond what an impact roll can handle, the choice is a TIS or Trougher Impact System. For loads beyond this chart contact Engineering

Table 10 - Return & Flat Ratings

BELT WIDTH	RETURN & FLAT CARRYING IDLERS RATINGS (lb)			
	B	C	D	E
18	220	475	600	
24	190	325	600	
30	165	250	600	
36	155	200	600	1000
42	140	150	500	1000
48	125	125	425	1000
54			375	925
60			280	850
66				775
72			155	700
78				625
84				550
90				475
96				400
102				250
2-Roll V-Returns		500	850	1300

Return Idler Series Selection

In the selection of return belt idlers, only the belt is supported, so the unit weight for the belt, W_b, is multiplied by the idler spacing to obtain the load per return idler.

Step 11) Determine the Calculated Idler Load for Returns (CIL_r)

$$CIL_r = (W_b * Si_r) + IML$$

where:

W_b = Weight of the belt (lb/ft) – use actual or estimate from Table 5

Si_r = Spacing of Return Idlers (ft) (normally 10 ft, some at 8 ft or twice the carrying spacing)

IML = Idler Misalignment Load (lb) = 1/6 * D * T / Si_r
where:

D = Misalignment (in) – This is the deviation in height from one idler to the adjacent idler.

T = Belt Tension (lb) & **Si** = Spacing of Idlers (ft)

Estimated CIL - when Tensions are not yet known

for well aligned structures

$$CIL = 1.25 * ((W_b + (W_m * K1)) * Si)$$

for portable or poor alignment

$$CIL = 1.5 * ((W_b + (W_m * K1)) * Si)$$

Step 12) Using the calculated value CIL_r, belt width, and troughing angle, select the Idler Series from Table 10

NOTE: Appropriate diameter of return rolls for abrasion may be different from troughing size. Remember, the dirty side of the belt rests on the return idlers.

Number of Idlers Required

Step 13) Determine the number of Idlers:

$$\# \text{ of TROUGHING IDLERS: } = ((C1 - Li) / Si) - 1$$

$$\# \text{ of IMPACT IDLERS: } = (Li / Si_i) - 1$$

$$\# \text{ of RETURN IDLERS: } = (C1 / Si_r) - 1$$

where

Si = Idler spacing (normally 4 ft)

Si_i = Impact Idler spacing (normally 1 ft)

Si_r = Return Idler spacing (normally 10', sometimes 8')

C1 = Conveyor Length

Li = Length of impact area

If transitional idlers or trainers are used, adjust idler quantities accordingly.

Suggested # of Self Aligners is one for every 25 carrying idlers, and one for every 10 return idlers.

Transition Idlers

Transition Idler Selection

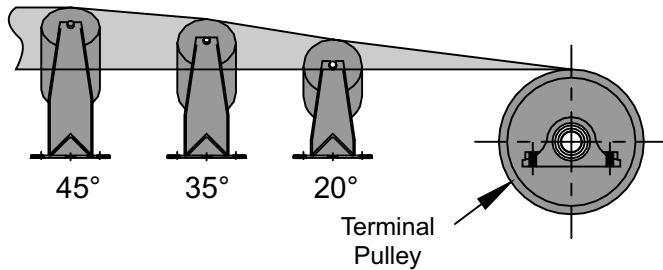



Table 11 - Minimum Transitional Spacing

TRANSITION IDLERS		
Idler Angle	Minimum Distance Suggested to Idler	Transition Arrangement
20°	1.0 x Belt Width	-----
35°	1.5 x Belt Width	35° - 20°
45°	2.0 x Belt Width	45°-35°-20°

Standard 20° & 35° troughing idlers should be used as transition idlers in most application to support the belt between the terminal pulley and the troughing idler of the largest angle used.

Note: Many conveyors will use the arrangement above, using lower angle troughers for transitional idlers, i.e. many conveyors use 35° troughers, with a quantity of 2 - 20° troughers, one at each end, as transitional idlers.

Table 12 - Transitional Spacing

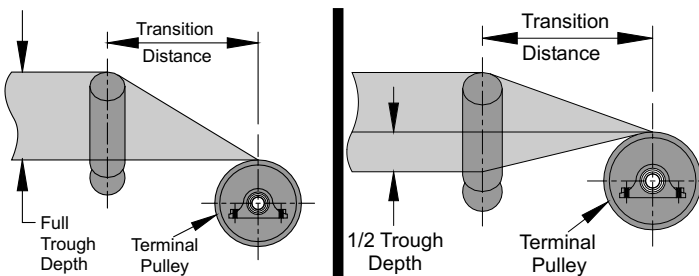

PULLEY AT TROUGH DEPTH				PULLEY AT 1/2 TROUGH DEPTH			
Idler Angle	% Rated Tension	Fabric Belts	Steel Cable	Idler Angle	% Rated Tension	Fabric Belts	Steel Cable
20°	Over 90	1.8b	4.0b	20°	Over 90	0.9b	2.0b
	60 to 90	1.6b	3.2b		60 to 90	0.8b	1.6b
	< than 60	1.2b	2.8b		< than 60	0.6b	1.0b
35°	Over 90	3.2b	6.8b	35°	Over 90	1.6b	3.4b
	60 to 90	2.4b	5.2b		60 to 90	1.3b	2.6b
	< than 60	1.8b	3.6b		< than 60	1.0b	1.8b
45°	Over 90	4.0b	8.0b	45°	Over 90	2.0b	4.0b
	60 to 90	3.2b	6.4b		60 to 90	1.6b	3.2b
	< than 60	2.4b	4.4b		< than 60	1.3b	2.3b

For operation & maintenance manuals, check out our website at <http://www.ppipella.com>, just click on Catalogs.

Subject to change without notice

If the distance to the first idler is greater than the suggested spacing in Table 11, the use of transition idlers is recommended, see Table 12, where b stands for Belt Width

Note: Pulley at 1/2 trough depth is preferred, as this will decrease the amount of "stretch" in the belt. As one can see from the table, not as much room is required for transitional distances. While one can make the pulley at trough depth work, it is a common practice to put the pulley at 1/2 trough depth.

Rolls & Roll Coverings

While many conveyors use steel rolls everywhere except on the impact idlers, some users will find that they will have build up problems on the return side, i.e. material from the dirty side of the belt being in contact with returns will build up on the return rolls.

The primary method of addressing build up on return rolls (in addition to belt scrapers) is to use RRD, or Return Rubber Disc on the return. This will help material to fall off before it can build up.

In extreme cases, even RRDs will not do the job well enough. For these cases, one can use other options, i.e. RRG, Return Rubber Grooved or BBR, Beater Bar Return. These options are used only after the RRD is first tried in a particular application.

Because the return is in contact with the carrying, or "dirty" side of the belt, it can also be subject to abrasion, wearing the roll. There are several options that can address this issue. One option is HD Rolls, or rolls with 1/4" thick cans (rolls). Another second option is to use lagging or a plastic sleeve over the roll.

For details on these & other options, visit our website at <http://www.ppipella.com>, just click on Catalogs and scroll down to idlers - Specialty Rolls.

Idler Selection-Example

Select Idlers for a conveyor that is going to transport 1,000 tons per hour of mined bituminous coal a distance of 300 feet with a lift of 50 feet.

Step 1) From Table 12 we find coal, bituminous, mined, the table tells us that the density is 50-54 lbs/ft³, Angle of Repose is 45°. To determine Angle of Surcharge, we use this information and cross-reference it to Diagram 2. While this diagram might suggest a larger Angle of Surcharge, we select 20°, as it is more common, and will be a more conservative selection.

Step 2) Determine the Volumetric Capacity C = TPH * 2000 / material density

$$C = 1,000 * 2,000 / 50 = 40,000 \text{ ft}^3/\text{hr}$$

Step 3) Determine the Equivalent Capacity Ceq = C * 100 / FPM. While we were not given a belt speed, the notes indicate a starting point of 500 fpm, and in looking in Table 13, we see the maximum belt speed listed of 500 to 700 fpm.

$$Ceq = 40,000 * 100 / 500 = 8,000$$

Step 4) While we were not given the troughing angle, we assume 35°, as this is the common style for equal troughers. Using this information, and Table 2, column for 20° surcharge angle we find that a 42 inch belt has a capacity of 8,169 ft³/hr at 100 fpm. Check lump size, i.e. max lump = BW / 5 or 42 / 5 = 8". If mostly fines then max lump = BW / 3 or 42/3 = 14"

Step 5) Calculate the Idler Load,

$$CIL = ((Wb + (Wm * K1)) * Si) + IML$$

Looking in Table 5, we find the Wb = 11 lb/ft

$$Wm = 33.3 * \text{TPH} / \text{FPM} = 33.3 * 1,000 / 500 = 66.6$$

We don't know lump size, so we assume 8" minus, and state that our design is based on 8

inch minus. Then we find that 8" minus for 50 lb/ft³ material has a K1 of 1 from Table 6.

We don't know tensions yet, so we can't determine IML, so we approximate it by calculating CIL without IML, and multiply it by 1.5 for an IML service factor. While we don't know Si, most conveyors will use 4 ft for Carrying Idler spacing.

$$CIL = 1.5 * ((11 + (66.6 * 1)) * 4) = 416 \text{ lbs}$$

Step 6) Determine Idler Series - Taking CIL and using Table 7, we find that a 35° trougher for 42 inch belt will have a rating of 791 lbs for a C idler.

Step 7) Using the 8 inch lump size we assumed earlier, we use Table 8 to find that the weight of this lump is approximately 21 pounds.

Step 8) While we don't know the drop yet, we can use Table 9 to find the check a possible drop of 6 feet. We find that a standard impact idler or EZI could handle a 6 foot drop with lump size of 20 pounds.

Step 9) However, it appears that the limiting factor for our conveyor will be material flow. Looking at 1,000 TPH on the bottom chart of Table 9, we find that even a 2 foot drop will require an impact system, unless the loading chute is designed to reduce the impact to the conveyor.

Step 10) This system will need an impact system: D6-35TIS-42SB or D6-35TISL-42SB

Step 11) Determine the return Idler

$$CILr = (Wb * Sir) + IML$$

Since we don't know IML, we will use a factor of 1.5.

$$CILr = 1.5 * (11 * 10) = 165 \text{ lbs}$$

Step 12) This is over the 150 pound rating

Idler Selection-Example

for a CEMA C return idler as shown in Table 10. Which means that we have several choices that are possible.

1. Use CEMA D return idler
2. Use 2 – roll V Return CEMA C return idler.
3. Use 8 feet for the spacing on return idlers
4. Plan on using CEMA C returns at 10 feet spacing at this time, but perform an actual IML check once tensions are known, and upgrade later if necessary.

Step 13) Calculate the number of idlers needed.

$$\# \text{ of Troughers} = ((C1 - Li) / Si) - 1 = ((300 - 6)/4) - 1 = 73$$

$$\# \text{ of } 35^\circ \text{ Troughers} = 73 - 2 = 71$$

$$\# \text{ of } 20^\circ \text{ Troughers (for transition)} = 2$$

$$\# \text{ of Impact idlers} = (Li/Sii) - 1 = (6/1) - 1 = 5 \text{ or } 1 \text{ impact system}$$

$$\# \text{ of Return Idlers:} = (C1/Sir)-1 = (300/10) - 1 = 29$$

$$C = \text{TPH} * 2000 / \text{density} = \text{_____} \text{TPH} * 2000 / \text{_____} \text{lb/ft}^3 = \text{A} \text{_____} \text{ft}^3/\text{hr}$$

$$Ceq = C * 100 / \text{FPM} = \text{_____} * 100 / \text{_____} \text{FPM} = \text{B} \text{_____}$$

$$Wm = 33.3 * \text{TPH} / \text{FPM} = 33.3 * \text{_____} \text{TPH} / \text{_____} \text{FPM} = \text{C} \text{_____} \text{lb}$$

$$\text{IML} = 1/6 * D * T / Si = 1/6 * \text{_____} \text{in} * \text{_____} \text{lb} / \text{_____} \text{ft} = \text{D} \text{_____} \text{lb}$$

$$\text{CIL} = ((Wb + (Wm * K1)) * Si) + \text{IML} = ((\text{_____} \text{lb} + (\text{_____} \text{lb} * \text{_____})) * \text{_____} \text{ft}) + \text{_____} \text{lb} = \text{E} \text{_____} \text{lb}$$

CEMA SERIES _____

$$\text{IML} = 1/6 * D * T / \text{Sir} = 1/6 * \text{_____} \text{in} * \text{_____} \text{lb} / \text{_____} \text{ft} = \text{F} \text{_____} \text{lb}$$

$$\text{CILr} = (Wb * \text{Sir}) + \text{IML} = (\text{_____} \text{lb} * \text{_____} \text{ft}) + \text{_____} \text{lb} = \text{G} \text{_____} \text{lb}$$

$$\# \text{ of Troughers} = ((C1 - Li) / Si) - 1 = ((\text{_____} \text{ft} - \text{_____} \text{ft}) / \text{_____} \text{ft}) - 1 = \text{H} \text{_____}$$

$$\# \text{ of } \text{_____}^\circ \text{ Troughers (for transition)} = \text{I} \text{_____}$$

$$\# \text{ of } \text{_____}^\circ \text{ Troughers} = \text{H} \text{_____} - \text{I} \text{_____} = \text{J} \text{_____}$$

$$\# \text{ of Impact idlers} = (Li/Sii) - 1 = (\text{_____} \text{ft} / \text{_____} \text{ft}) - 1 = \text{K} \text{_____}$$

$$\# \text{ of Return Idlers:} = (C1/Sir)-1 = (\text{_____} \text{ft} / \text{_____} \text{ft}) - 1 = \text{L} \text{_____}$$

Appendix - Table 13 Material Properties

Material	Avg. Wt /cu. ft.	Max. Incline	Repose Angle	Material	Avg. Wt /cu. ft.	Max. Incline	Repose Angle
Alfalfa seed	10-15		29	Brewers grain, wet	55-60		45
Alum, fine	45-50		30-44	Brick, hard	125		
Alum, lumpy	50-60		30-44	Brick, soft	100		
Alumina	50-65	10-12	22	Bronze chips, dry	30-50		44-57
Aluminum chips	7-15		45	Buckwheat	37-42	11-13	25
Aluminum hydrate	18	20-24	34	Calcium carbide	70-80		30-44
Aluminum oxide	70-120		29	Calcium lactate	25-29		
Aluminum silicate	49		30-44	Carbon, dry, fine	8-20		20-29
Aluminum sulphate	54	17	32	Carbon black pellet	20-25		25
Ammonium chloride	45-52		30-44	Carbon black powder	4-7		30-44
Ammonium nitrate	45		30-44	Carborundum, 3"/less	120		20-29
Ammonium sulph. grain	45-58		44	Cast iron chips	90-200		45
Ash, black, ground	105	17	32	Cement, portland	72-99	20-23	30-44
Ash, coal, dry, 1" less	35-40	20-25	45	Cement, portland aer.	60-75		
Ash, coal, dry, 3" less	35-40		45	Cement, clinker	75-95	18-20	30-40
Ash, coal, wet 1" less	45-50	23-27	45	Cement mortar	133		
Ash, coal, wet, 3" less	45-50		45	Chalk, lumpy	75-85		45
Ashes, fly	40-45	20-25	42	Chalk 100 mesh	65-75		
Ash, gas, wet	78			Charcoal	18-25	20-25	35
Asphalt for paving	80-85			Chips, paper mill	20-25		
Asphalt, crushed 1" less	45		30-44	Chips, pm, softwood	12-30		
Bagasse	7-10		45	Chips, hogged, fuel	15-25		
Barite	180		30-44	Chrome ore (chromite)	125-140		30-44
Barium carbonate	72		45	Cinders, blast furnace	57	18-20	35
Bark, wood, refuse	10-20	27	45	Cinders, coal	40	20	35
Barley	37-48	10-15	23	Clay calcined	80-100		
Basalt	80-103	20-28		Clay, dry, fines	100-120	20-22	35
Bauxite, mine run	80-90	17	31	Clay, dry, lumpy	60-75	18-20	35
Bauxite, crushed 3" less	75-85		30-44	Coal, anthracite, river	60	18	35
Beans, castor, whole	36	8-10	20-29	Coal, anthracite, sized	55-60	16	27
Beans, castor, meal	35-40	8-10		Coal, bituminous, mined	50-54	24	45
Beans, navy, dry	48		29	Coal, bituminous, sized	45-55	16	35
Beans, navy, steeped	60		35-40	Coal, bituminous, run	45-55	18	38
Beet pulp, dry	12-15			Coal, bituminous, slack	43-50	22	40
Beet pulp, wet	25-45			Coal, bituminous, strip	50-60		
Beets, whole	48		50	Coal, lignite	40-45	22	38
Bentonite, crude	35-40	20	42-44	Coke, loose	23-35	18	30-44
Bentonite 100 mesh	50-60	20	42	Coke, petroleum calc.	35-45	20	30-44
Benzine hexachloride	56			Coke, breeze 1/4" less	25-35	20-22	30-44
Bones	34-40		45	Concrete, cinder	90-100	12-30	
Boneblack, 100 mesh	20-25		20-29	Concrete, 2" slump	110-150		24-26
Bonechar	27-40		30-44	Concrete, 4" slump	110-150		20-22
Bonemeal	55-60		30-44	Concrete, 6" slump	110-150		12
Borax, 2"-3" lumps	60-70		30-44	Copper ore	120-150	20	30-44
Borax, 1"-2" lumps	55-60		30-44	Copper ore, crushed	100-150		
Borax, fine	45-55	20-22		Copper sulfate	75-85	17	31
Boron	75			Corn, cracked	45-50		
Bran	10-20		30-44	Corn, ear	56		
Brewers grain, dry	25-30		45	Corn, shelled	45	10	21

Appendix - Table 13 Material Properties

Material	Avg. Wt /cu. ft.	Max. Incline	Repose Angle	Material	Avg. Wt /cu. ft.	Max. Incline	Repose Angle
Cornmeal	32-40	22	35	Hominy	37-50		30-44
Cottonseed, cake, crack	40-45		30-44	Ice, crushed	35-45		19
Cottonseed hulls	12		45	limenite ore	140-160		30-44
Cottonseed meal	35-40	22	35	Iron borings	125		
Cryolite, dust	75-90		30-44	Iron ore	100-200	18-20	35
Cryolite, lumpy	90-100		30-44	Iron ore crushed	135-150	20-22	
Cullet	80-120	20	30-44	Iron oxide pigment	25	25	
Diatomaceous earth	11-14		30-44	Kaolin clay 3" under	63	19	35
Dicalcium phosphate	40-50		45	Kaolin talc, 100 mesh	45-56	23	
Disodium phosphate	25-31		30-44	Lead arsenate	72		45
Dolomite, lumpy	80-100	22	30-44	Lead ores	200-270	15	30
Earth, as excav. Dry	70-80	20	35	Lead oxides	60-150		45
Earth, wet, w/clay	100-110	23	45	Lignite, air dried	45-55		30-44
Ebonite, crushed 1/2"	65-70		30-44	Lime, ground 1/8" less	60-65	23	43
Feed, cattle & fowl	45-50			Lime, hydrated 1/8" less	40	21	40
Feldspar, 1/2" screenings	70-85	18	38	Lime, pebble	53-56	17	30
Feldspar, 1"-3" lumps	90-110	17	34	Limestone, agi. 1/8" less	68	20	30-44
Feldspar, 200 mesh	100		30-44	Limestone, crushed	85-90	18	38
Ferrous sulphate	50-75			Limestone, dust	80-85	20	
Fish meal	35-40			Linseed meal	27	20	34
Flaxseed	45	12	21	Litharage, pulverized	200-270		
Flaxseed meal	25		30-44	Magnesium chloride	33		40
Flour, wheat	35-40	21	45	Magnesium sulphate	40-50		30-44
Flue dust, dry	35-40		20	Malt, dry gr. 1/8" less	22		30-44
Fluorspar 1/2" screen	85-105		45	Malt, dry whole	27-30		20-29
Fluorspar, 1"-3" lumps	110-120		45	Malt, wet	60-65		45
Foundry sand, loose	80-90		30-44	Malt, meal	36-40		30-44
Foundry sand, old	70-100		30-44	Manganese dioxide	80		
Fullers earth, dry	30-35		23	Manganese ore	125-140	20	39
Fullers earth, oily	60-65		20-29	Manganese sulphate	70		30-44
Fullers earth, burned	40		20-29	Marble, crushed 1/2" less	80-95		30-44
Fullers earth, raw	35-40	20	35	Meat scraps	50-55		30-44
Garbage, household	50			Mica, ground	13-15	23	34
Gilsonite	37			Mica, pulverized	13-15		
Glass batch	80-100		0-10	Mica, flakes	17-22		19
Granite, 1/2" screenings	80-90		20-29	Milo, maize	56		30-44
Granite, 1"-3" lumps	85-90		20-29	Molybdenite, powdered	107	25	40
Granite, broken	95-100		30-44	Mortar, wet	150		
Graphite, flake	40		30-44	Muriate of potash	77		
Grass seed	10-12		30-44	Mustard seed	45-48		20-29
Gravel, bank run	90-100	20	38	Nickel-cobalt sulphate	80-150		30-44
Gravel, pebbles	90-100	12	30	Oats	26-35	10	21
Gypsum, dust nonaera.	93			Oats, rolled	19-24		20-34
Gypsum, dust aerated	60-70	23		Oil cake	48-50		45
Gypsum, 1/2" screening	70-80	21	40	Oxalic acid crystals	60		30-44
Gypsum, 1"-3" lumps	70-80	15	30	Oyster shell 1/2" less	50-60		30-44
Guano, dry	70		20-29	Oyster shell, whole	80		30-44
Gunpowder	63			Paper pulp stock	40-60		19
Hay, loose	5			Peanuts, in shells	15-24		30-44

For operation & maintenance manuals, check out our website at <http://www.ppipella.com>, just click on Catalogs.

Copyright © 2007-2009, Precision Pulley & Idler, All Rights Reserved

Subject to change without notice

Catalog ISG, Rev 10/09

800.247.1228 
www.ppipella.com Employee Owned

Appendix - Table 13 Material Properties

Material	Avg. Wt ./cu. ft.	Max. Incline	Repose Angle	Material	Avg. Wt ./cu. ft.	Max. Incline	Repose Angle
Peanuts, shelled	35-45		30-44	Soapstone, talc, fine	40-50		
Peas, dried	45-50			Soda ash, briquettes	50	7	22
Phosphate, fertilizer	60	13	26	Soda ash, heavy	55-65	19	32
Phosphate triple super	50-55	30	45	Soda ash, light	20-35	22	37
Phosphate rock dry	75-85	12-15	25-29	Sodium bicarbonate	41	23	
Phosphate rock, crush	60	25	40	Sodium nitrate	70-80	11	24
Plystyrene beads	35		23	Sodium phosphate	50-65		37
Potash salts, sylvite	80		20-29	Sodium alum. sulphate	75		30-44
Potassium carbonate	51		20-29	Sorghum seed	32-52		30-44
Potassium chloride	120-130		30-44	Soybeans, cracked	30-40	15-18	35
Potassium nitrate	76-80		20-29	Soybeans, whole	45-50	12-16	21-28
Potassium sulphate	42-48		45	Soybean cake, 1/2" over	40-43	17	32
Pumice 1/8" less	40-45		45	Soybean flakes, raw	20-26		30-44
Pyrites 2"-3" lumps	135-145		20-29	Soybean meal, cold	40	16-20	32-37
Pyrites, pellets	120-130		30-44	Soybean meal, hot	40		30-44
Quartz 1/2" screen	80-90		20-29	Starch	25-50	12	24
Quartz 1"-3" lumps	85-95		20-29	Steel chips	100-150		30-44
Rice, hulled	45-48	8	19	Steel trimmings	75-150	18	35
Rice, rough	36		30-44	Sugar, granulated	50-55		30-44
Rock, crushed	125-145		20-29	Sugar, powdered	50-60		
Rock, soft	100-110	22	30-44	Sugar, raw, cane	55-65		45
Rubber pellets	50-55	22	35	Sugar, wet, beet	25-45		20-29
Rubber, reclaim	25-30	18	32	Sugar cane, knifed	15-18		45
Rye	42-46	8	23	Sulphate powdered	50-60	21	30-44
Salicylic acid	29			Sulphate, crushed 1/2"	50-60	20	30-44
Salt, dry, coarse	40-55	18-22		Sulphate, 3" less	80-85	18	30-44
Salt, dry, fine	70-80	11	25	Taconite, pellets	116-130	13-15	30-44
Salt cake, dry, coarse	85	21	36	Talc, 1/2" screen	80-90		20-29
Salt cake, dry pulv.	60-85		20-29	Talc, 1"-3" lumps	85-95		20-29
Sand, bank, damp	105-130	20-22	45	Talc, solid	165		
Sand, bank, dry	90-110	16-18	35	Tobacco leaves, dry	12-14		45
Sand, foundry, prepared	80-90	24	30-44	Tobacco stems	15		45
Sand, foundry, shakeout	90-100	22	39	Traprock, 1/2" screens	90-100		30-44
Sand, silica, dry	90-100	10-15	20-29	Traprock, 2"-3" lumps	100-110		30-44
Sand, core	65	26	41	Trisodium phosphate	60		
Sandstone, broken	85-90		30-44	Trisodium phos. gran.	60	11	30-44
Sawdust	10-13	22	36	Trisodium phos. Pulv.	50	25	40
Sewage, sludge	40-50		20-29	Triple super phos.	50-55		
Shale, broken	90-100		20-29	Vermiculite, expan.	16		45
Shale, crushed	85-90	22	39	Vermiculite ore	70-80	20	
Sinter	100-135		35	Wheat	45-48	12	28
Slag, crushed, furnace	80-90	10	25	Wheat, cracked	35-45		30-44
Slag, granular, dry	60-65	13-16	25	Wood chips	10-30	27	45
Slag, granular, wet	90-100	20-22	45	Wood shavings	8-15		
Slate, 1/2" less	80-90	15	28	Zinc concentrates	75-80		
Slate, 1"-3" lumps	85-95			Zinc ore, crushed	6-8	22	38
Soap granules	15-25		30-44	Zinc ore, roasted	110		38
Soap chips	15-25	18		Zinc oxide, heavy	30-35		45-55
Soap detergents	15-50			Zinc oxide, light	10-15		45

Appendix - Belt Speed & Misc Idler Rating

Table 14
Maximum Recommended Belt Speeds

Material being conveyed	Belt Speeds (FPM)	Belt Width
Grain or other free flowing non-abrasive materials	400	18
	600	24-30
	800	36-42
	1000	48-96
Coal, damp clay, soft ores, overburden and earth, fine crushed stone	600	18
	800	24-36
	1000	42-60
	1200	72-96
Foundry sand prepared or damp, shakeout sand with small cores with or without small castings not hot enough to harm the belt	350	Any width
Prepared foundry sand and similar damp (or dry abrasive) materials discharged from belt by plows	200	Any width
Non-abrasive materials discharged from belt by means of plows	200 Except for wood pulp where 300-400 is preferred	Any width
Feeder belts, flat or troughed, for feeding fine, non-abrasive or mildly abrasive materials from hoppers	50 - 100	Any width
Coal (bituminous, sub-bituminous), PBR coal, lignite, petroleum coke, gob, culm and silt	500 to 700 for belt conveyors, 380 to 500 for silo feed conveyors and tripper belt conveyors	Any width
Power Generating Plant Applications	500 for belt conveyors 380 for silo feed conveyors and tripper belt conveyors	Any width

Table 15
Misc Idler Load Ratings

BELT WIDTH	Picking Idler Load Rating (lb)		
	C	D	E
24	475	600	
30	475	600	
36	325	600	1260
42	250	600	1200
48	200	530	1000
54	150	440	1000
60	125	400	1000
72		280	925
84			775
96			625
BELT WIDTH	Live Shaft Idler Load Rating (lb)		
	C	D	E
18	1200		
24	1200	1400	
30	1200	1400	
36	1200	1400	2100
42	1100	1400	2100
48	1000	1275	2100
54	875	1150	2100
60	780	1000	2100
72		850	2100
84			1825
96			1550

Table 16
Idler Spacing Recommendations

BELT WIDTH (in)	TROUGHING IDLERS						RETURN IDLERS
	Weight of material handled: lbs per cu. ft.						
	30	50	75	100	150	200	
18	5.5ft	5.0ft	5.0ft	5.0ft	4.5ft	4.5ft	10.0ft
24	5.0ft	4.5ft	4.5ft	4.0ft	4.0ft	4.0ft	10.0ft
30	5.0ft	4.5ft	4.5ft	4.0ft	4.0ft	4.0ft	10.0ft
36	5.0ft	4.5ft	4.0ft	4.0ft	3.5ft	3.5ft	10.0ft
42	4.5ft	4.5ft	4.0ft	3.5ft	3.0ft	3.0ft	10.0ft
48	4.5ft	4.0ft	4.0ft	3.5ft	3.0ft	3.0ft	10.0ft
54	4.5ft	4.0ft	3.5ft	3.5ft	3.0ft	3.0ft	10.0ft
60	4.0ft	4.0ft	3.5ft	3.0ft	3.0ft	3.0ft	10.0ft
72	4.0ft	3.5ft	3.5ft	3.0ft	2.5ft	2.5ft	8.0ft
84	3.5ft	3.5ft	3.0ft	2.5ft	2.5ft	2.0ft	8.0ft
96	3.5ft	3.5ft	3.0ft	2.5ft	2.0ft	2.0ft	8.0ft

For operation & maintenance manuals, check out our website at <http://www.ppipella.com>, just click on Catalogs.

Copyright © 2007-2009, Precision Pulley & Idler, All Rights Reserved

Subject to change without notice

Catalog ISG, Rev 10/09