


Inline Transition Equal Trougher


Providing a smooth transition from a flat belt to a troughed belt or vice versa is critical in promoting long life of the components in the transition area and most importantly, extending the life of the belt. PPI's adjustable Transition Troughing Idlers provide precise adjustment in 2.5° increments allowing the user to fine tune the trough angle in the transition area.

FEATURES AND BENEFITS

- Reduce belt stress
- Extends the life of transition area components
- Adjustable in 2½° increments
- Available in CEMA C, D, E and F
- Available in offset and inline troughers
- End brackets are removeable easing the installation process

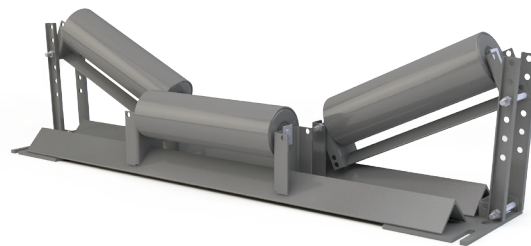

Offset Transition Equal Trougher

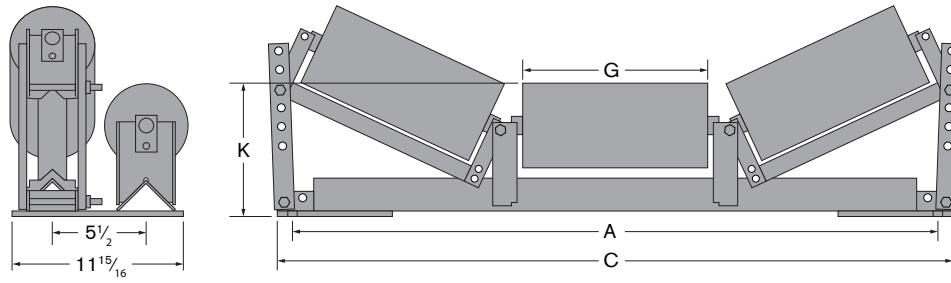

5° - 35° CEMA C EQUAL TROUGHER

BELT WIDTH	4" ROLL DIAMETER			5" ROLL DIAMETER			6" ROLL DIAMETER			BELT WIDTH	STANDARD DIMENSIONS		
	PART NUMBER	K	WT	PART NUMBER	K	WT	PART NUMBER	K	WT		A	C	G
18	C4-35TET-18SB	8	73	C5-35TET-18SB	8 1/2	76	C6-35TET-18SB	9	84	18	27	29	6 3/4
20	C4-35TET-20SB	8	75	C5-35TET-20SB	8 1/2	79	C6-35TET-20SB	9	88	20	29	31	7 5/8
24	C4-35TET-24SB	8	81	C5-35TET-24SB	8 1/2	85	C6-35TET-24SB	9	95	24	33	35	8 15/16
30	C4-35TET-30SB	8 1/8	89	C5-35TET-30SB	8 5/8	94	C6-35TET-30SB	9 1/8	105	30	39	41	11 1/8
36	C4-35TET-36SB	8 1/8	97	C5-35TET-36SB	8 5/8	103	C6-35TET-36SB	9 1/8	115	36	45	47	13 1/4
42	C4-35TET-42SB	8 1/2	106	C5-35TET-42SB	9	113	C6-35TET-42SB	9 1/2	126	42	51	53	15 7/16
48	C4-35TET-48SB	8 1/2	116	C5-35TET-48SB	9	123	C6-35TET-48SB	9 1/2	137	48	57	59	17 5/8
54	C4-35TET-54SB	8 1/2	125	C5-35TET-54SB	9	132	C6-35TET-54SB	9 1/2	148	54	63	65	19 3/4
60	C4-35TET-60SB	8 1/2	133	C5-35TET-60SB	9	142	C6-35TET-60SB	9 1/2	159	60	69	71	21 3/4

5° - 35° CEMA D EQUAL TROUGHER

BELT WIDTH	5" ROLL DIAMETER			6" ROLL DIAMETER			BELT WIDTH	STANDARD DIMENSIONS		
	PART NUMBER	K	WT	PART NUMBER	K	WT		A	C	G
24	D5-35TET-24SB	8 1/2	92	D6-35TET-24SB	9	100	24	33	35	8 15/16
30	D5-35TET-30SB	8 5/8	102	D6-35TET-30SB	9 1/8	111	30	39	41	11 1/8
36	D5-35TET-36SB	8 5/8	112	D6-35TET-36SB	9 1/8	122	36	45	47	13 1/4
42	D5-35TET-42SB	9	123	D6-35TET-42SB	9 1/2	134	42	51	53	15 7/16
48	D5-35TET-48SB	9	134	D6-35TET-48SB	9 1/2	146	48	57	59	17 5/8
54	D5-35TET-54SB	9 1/2	144	D6-35TET-54SB	10	158	54	63	65	19 3/4
60	D5-35TET-60SB	9 1/2	155	D6-35TET-60SB	10	170	60	69	71	21 3/4
72	D5-35TET-72SB	9 1/2	175	D6-35TET-72SB	10	192	72	81	83	26



www.ppi-global.com | sales@ppi-global.com

Product shown are for illustrative purposes only and may display optional accessories or components. Please contact your sales representative for more information on product specifications. PPI respectively reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice obligation. PPI and its respective logos are trademarks of Precision, Inc. in the US and or other countries.