


HEX SHAFT STYLE DATA SHEET

FRM 023_01 01/25



CHOOSE 1 OPTION AND FILL OUT EACH BOX REQUESTED

OPTION 1 - HEX ROLLER WITH NO SHAFT / HEX REMOVABLE SHAFT / SPRING LOADED SHAFT

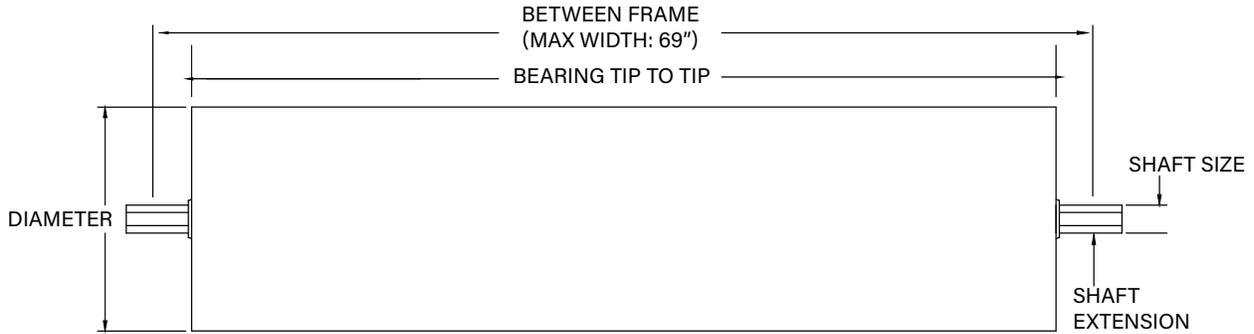


DIAMETER - 1.9"
7/16 SHAFT ONLY
Circle one
16 ga Galvanized Mild Steel .145 PVC
BEARING TIP TO TIP _____
BETWEEN FRAME _____
SHAFT LENGTH _____
SHAFT STYLE: C (NO SHAFT) / CS (PIN RETAINED) / CSS (SPRING LOADED)
QTY _____

DIAMETER - 2"
7/16 SHAFT ONLY
14 ga Galvanized or Mild Steel
BEARING TIP TO TIP _____
BETWEEN FRAME _____
SHAFT LENGTH _____
SHAFT STYLE: C (NO SHAFT) / CS (PIN RETAINED) / CSS (SPRING LOADED)
QTY _____

DIAMETER - 2.5"
Circle one 7/16 or 11/16 SHAFT
Circle one
14 ga or 11 ga Steel
BEARING TIP TO TIP _____
BETWEEN FRAME _____
SHAFT LENGTH _____
SHAFT STYLE: C (NO SHAFT) / CS (PIN RETAINED) / CSS (SPRING LOADED)
QTY _____

OPTION 2 - NON-REMOVABLE SHAFT WITH HEX SHAFT ENDS

THIS OPTION DOES NOT HAVE A SPRING-LOADED SHAFT

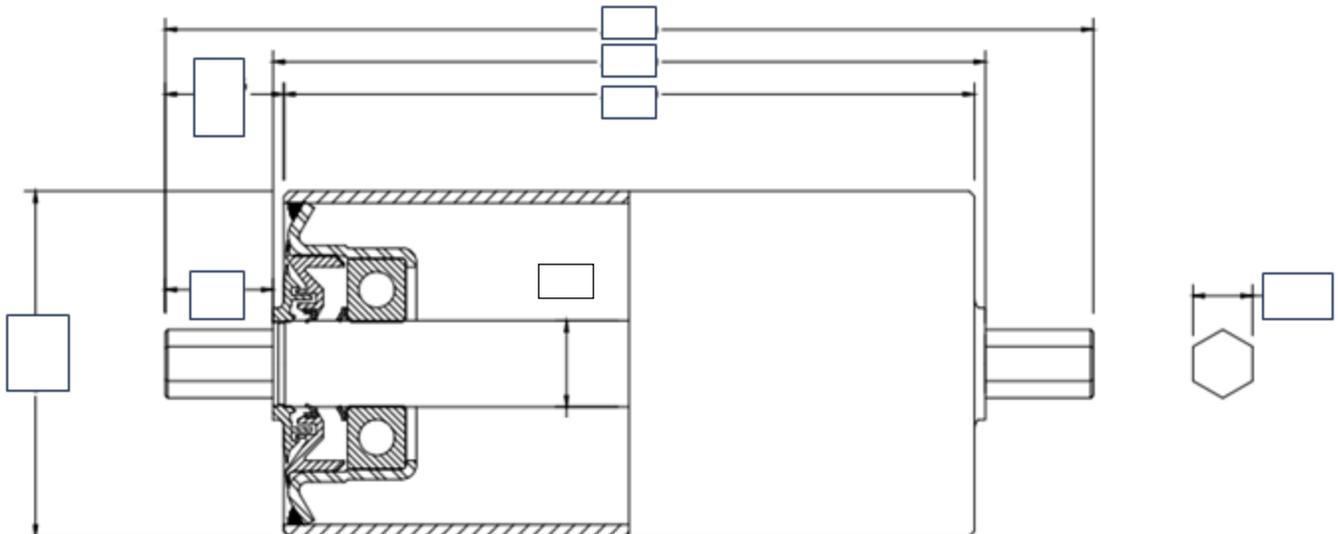

NOTES: