

The PPI Pro Tracker is a great solution for your belt tracking issues. With continuous engagement on the return belt, this lagged trainer pivots to guide the belt, this lagged return trainer pivots to guide the belt to its central position, resulting in less material loss and belt damage. Mounted with two adjustable brackets for easy installation and no exposed frame for material build up, the PPI Pro Tracker will become your most reliable belt tracking idler.




FEATURES AND BENEFITS


- Continuous alignment
- Internal swivel
- Immediate centering engagement
- Lagging to shed material:
 SBR Diamond Groove or Urethane
- · Large diameter roll for long service life
- No frame for material to build up on
- Adjustable bracket for installation ease
- Sealed for life ball bearings
- Example Part Number: TRACK-48L8DA (1/2" SBR diamond groove lagging) TRACK-48U8 (1/2" Urethane lagging)


PRO TRACKER





- 8" Diameter roll
- Belt widths of 18" to 72"
- Wide base belt widths of 18" to 66"
- Extra seals and gaskets protect the bearing from contaminants
- Adjustable mounting 1" increments
- Top hole is 2.75" from top of bracket to center of roll
- Bottom hole is 5.75" from top of bracket to center of shaft
- When belt is centered the roll is level
- When the belt becomes off center the roll turns and tilts as shown
- See Operation and Maintenance manual for additional information





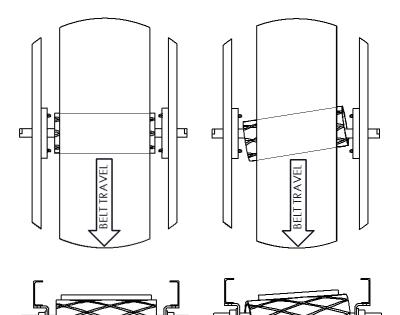





WWW.PPI-GLOBAL.COM | SALES@PPI-GLOBAL.COM

Product shown are for illustrative purposes only and may display optional accessories or components. Please contact your sales representative for more information on product specifications. PPI respectively reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice obligation. PPI and its respective logos are trademarks of Precision, Inc. in the US and or other countries.